

FLOOR SPRING



- Hitech & Innovative International product
- Heavy Duty & Compact Size
- Suitable for Wood, Metal & Glass Door
- Niddle and Double Bearing for smooth working
- Suitable for Door Weighing upto 130 Kgs.
- Can be used for left, right & double action door.
- Suitable for high traffic Doors.
- Two Independent Speed valves for Closing & Latching Spped.
- Galvanize Plated Cement Box and specially Mfg. on high precision machine.
- Lekar Color coated Body.
- Special Hydraulic Fluid suitable for Hot and Cold condition.
- Extendable steel Pivots with Niddle Bearing.

PATCH FITTING – JE-101



Top Patch to suit most 15 mm dia. top pivots.

Actual size 165 mm x 52 mm
Pivot point at 55 mm or 65 mm.
To suit 10, 12 mm Glass.


Material:

White Metal & Stainless Steel 304 & 316

Finish:

Satin Finish, Glossy Finish.

PATCH FITTING – JE-102

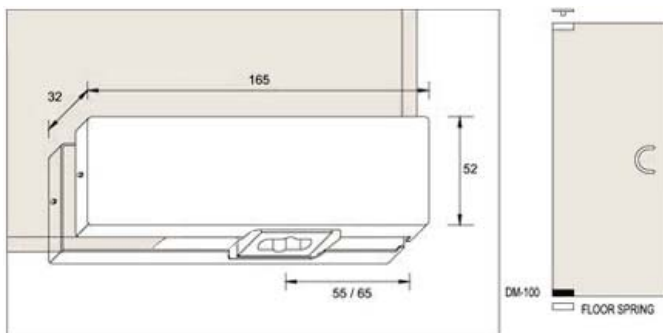

Bottom Patch to suite most floor Spring or free pivots.

Actual size 165 mm x 52 mm
To suit 10, 12, 15 mm Glass.


Material:

White Metal & Stainless Steel 304

Finish:

Satin Finish, Glossy Finish.

GLASS CONNECTOR – JE-1

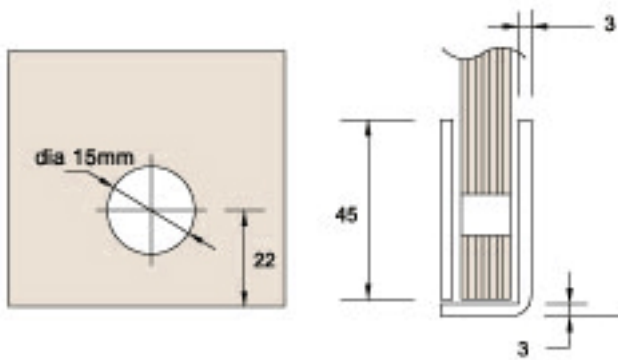

Bracket Suitable for Wall to Glass application.
To suit 8,10 or 12 mm glass.


Material:

Stainless Steel 304 4316

Finish:

Satin Finish, Glossy Finish

GLASS CLAMP

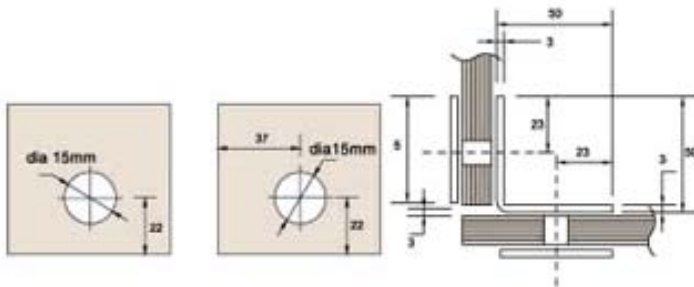

Bracket Suitable for 90 degree glass to Glass application.
To suit 8,10 or 12 mm glass.

Material:

Stainless Steel: 304 & 316

Finish:

Satin Finish, Glossy Finish.